


# EVEREST

## SOLID BLEACHED SULFATE BOARD

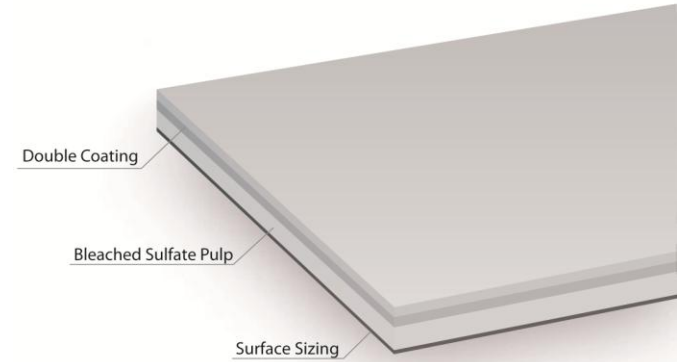

**Specifications:**

Property	Unit	Value													Standard
Basis Weight	g/m <sup>2</sup> +/- 5%	210	225	240	270	295	305	325	335	365	395	425	455	485	T-410
Thickness	µm	254	279	305	356	381	406	432	457	508	559	610	660	711	T-411
Caliper	inches	0.010	0.011	0.012	0.014	0.015	0.016	0.017	0.018	0.020	0.022	0.024	0.026	0.028	T-489
Stiffness Taber (15°) MD	mNm	5.9	6.4	7.1	11.8	14.2	17.2	19.1	22.6	29.4	37.3	47.6	58.8	68.6	T-489
Stiffness Taber (15°) CD		3.2	3.4	3.5	5.9	6.9	7.8	9.3	10.8	14.2	18.1	23.0	27.0	31.9	
Moisture Content	%	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	7.0	7.0	T-412
Internal Bond Strength Scott	J/m <sup>2</sup>	168.2													T-569
GE Brightness Top	GE Units	87.5													T-452
ISO Brightness Top	%	87.5													ISO 2470
L* Top		94.0													ISO 5631:2
a* Top		0.0													
b* Top		0.5													
Gloss 75° Gardner	%	55													T-480
Roughness PPS S10	µm	1.10													T-555

Issued on 11<sup>th</sup> July 2013

All data are target values.

International Paper Riegelwood, Augusta and Texarkana mills operate in compliance with the following standards: **PN-EN ISO 14001**

(wood procurement), **PN-EN ISO 9001**, **FSC®** Chain-of-Custody, **PEFC** Chain-of-Custody and **SFI®** Chain-of-Custody.

Visit us at: <http://www.internationalpaper.com/EMEA/EN/Products/CoatedBoard/index.html>